

Kubota®

KUBOTA UTILITY VEHICLE



RTV400



\*Note: This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.




# Introducing the new petrol-powered 4WD RTV400Ci featuring mid-size utility, agility, and legendary Kubota reliability

Featuring a robust, heavy-duty platform, electronic fuel injection (EFI) and an advanced Continuously Variable Transmission with inertial clutch (CVT Plus) for excellent response and reliability, the new 4WD RTV400Ci will be at your ready, whether you're canvassing your property or jobsite, caring for livestock, or hunting in the woods.



Standard Rollover Protective Structure (ROPS)

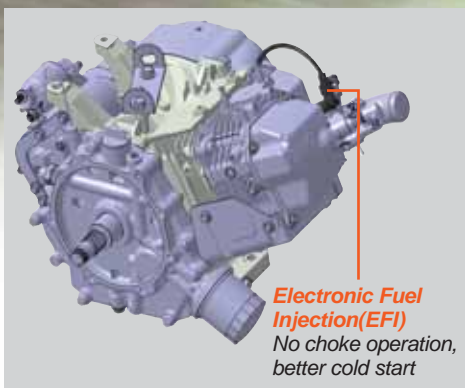

**Electronic Fuel Injection (EFI)**  
No choke operation, better cold start


## 16HP Air-cooled EFI Petrol Engine

The RTV400Ci incorporates a new, high-revving 16HP air-cooled, single-cylinder petrol engine that was developed to meet Kubota's stringent performance specifications and durability requirements. This engine also features an Electronic Fuel Injection (EFI) system that helps eliminate cold starting issues and annoying manual choke adjustments that plague competitors' carbureted utility vehicles.

## CVT Plus

(Continuously Variable Transmission with Inertial Clutch)

The RTV400Ci's newly designed CVT Plus is virtually worry free. The exclusive inertial clutch keeps the thick, double cogged-belts tight for minimal slippage, resulting in greater response and much better durability than the competitors' belt-drive systems. As an additional plus, the inertial clutch provides noticeable dynamic braking to help maintain control during descents with engine-assisted deceleration. And for more plus, CVT Plus has a full protection cover to minimize mud or dust intrusion, enhancing durability and enabling a longer belt life.

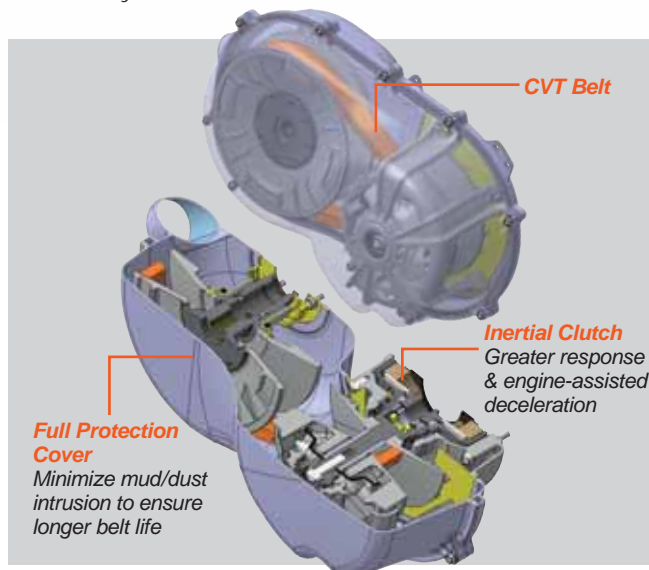

**Full Protection Cover**  
Minimize mud/dust intrusion to ensure longer belt life

**CVT Belt**

**Inertial Clutch**  
Greater response & engine-assisted deceleration



Robust, reliable semi-independent rear suspension



4-wheel disc brakes





### Comfortable Operator Area

Get in and get going. The RTV400Ci features ergonomic, well-placed controls for easy operation, and a comfortable contoured bench seat, so both the driver and passenger can enjoy a full day of work or play. The low operator platform offers ample and obstacle-free leg room, so it's simple to step on or off.

### Designed for Convenient Transportation

Kubota specifically designed the RTV400Ci's compact frame to make it easy to Transport\*. It's ideal for camping, hunting, or any rugged outdoor adventure.



*\* Always secure RTV with proper tie-downs, especially with open tailgate.*



KUBOTA UTILITY VEHICLE  
**RTV400** 

# Specifications

Model Name		RTV400Ci	
Engine	Type	1 cylinder OHC, Air-cooled, EFI Petrol	
	Displacement	cc	404
	Horsepower	HP (kW) / rpm	16.0 (11.9) / 4800rpm
Fuel tank capacity	ℓ	20	
Transmission		CVT Plus Continuously Variable Transmission (CVT) with inertial clutch	
Max. traveling speed	km/h	40	
Wheels, drive system		4, 4WD w/2WD selection	
Differential lock		Standard; hand operated with mechanical holder	
Gear selection		Hi-Lo range forward, neutral, reverse	
Brakes	Front / Rear	Dry-disc brakes	
	Parking brake	Rear wheel, hand lever	
Steering		Rack & Pinion	
Suspension	Front / Rear	Independent, Mac-Pherson strut-type / Semi-independent, multi-link	
Dimensions	Length	mm	2690
	Width	mm	1390
	Height, overall	mm	1829
	Front tread centers	mm	1016
	Rear tread centers	mm	1041
	Wheelbase	mm	1800
	Ground clearance front/rear axle	mm	205 / 172
Turning diameter	m	7	
Max. rolling weight (towing capacity)	kg	500	
Payload capacity	kg	480	
Weight	kg	570 with HDWS Tire, 565 with ATV Tyre	
Cargo bed	Width × Length × Depth	mm	1032 × 856 × 290
	Volume	m <sup>3</sup>	0.25
	Bed height (unloaded)	mm	810
	Cargo bed load	kg	200
Tyres	Front	24 × 9-12 ATV, 6PLY	
		24 × 9-12 HDWS, 6PLY	
	Rear	24 × 11-12 ATV, 6PLY	
		24 × 11-12 HDWS, 6PLY	
Body color		Orange	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above. Some RTVs in this brochure are shown with optional accessories. For off-highway use only.

## KUBOTA Tractor Australia Pty Ltd

25-29 Permas Way, TRUGANINA Vic, 3029  
 Freecall: 1800 334 653  
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

## CB Norwood Distributors Ltd

PO Box 1265, 888 Tremaine Avenue,  
 Palmerston North 0800 KUBOTA  
 Tel: 06 356 4920 Fax: 06 356 4939

Web Site: <http://www.kubota.co.nz>